

CATALOGUE 2023



M + A MATTING

We make facilities
SAFE. CLEAN. UNIQUE.

TABLE OF CONTENTS

IMAGE MATS	05
Colorstar®	06-07
Colorstar® Special Shape	08-09
Optigrafic	10-11
Optibrush	12-13
Superscrape™ Impressions Plus.....	14-15
Berber Impressions.....	16-17
Chair Mats Impressions	18-19
Premium Bar & Counter Mat.....	20-21
Promo Floor Mat.....	22-23
Counter Impressions.....	24-26
STANDARD MATS	27
Classic Brush™	28-29
Crystal Cotton.....	30-31
Classic Solutions Nylon.....	32-33
Microluxx™	34-35
Superscrape	36-37
Waterhog® Classic.....	38-39
Waterhog® Diamond.....	40-41
Waterhog® Plus	42-43
Waterhog® Eco Premier Tile	44-45

ANTI-FATIGUE MATS	47
Comfort Flow™	48-49
Complete Comfort™	50-51
Complete Comfort™II	52-53
Hog Heaven®	54-55
Hog Heaven III® Linkable Tile	56-57
SPECIALTY MATS	59
Anchor Safe® Lift Truck Mat.....	60-61
Anchor Safe® Roll Goods	62-63
StepWell™ Optibrush	64-65
Message Mats	66-73


Part of the contents of this **brochure** is **interactive**. For easy browsing, it is possible to  **click** here on the **product name**, as well on the **contact information** of our company on other pages.

IMAGE MATS





COLORSTAR®

Image / Wiper / Dust control / Indoor

- **HIGH-QUALITY PRINT** | Logos and designs are digitally printed; fine details, shading, and 3D images can be achieved; 66 standard color options available.
- **INCREDIBLE STAIN RESISTANCE** | no cross staining, easy to clean.
- **RECYCLED CONTENT** | Yarn contains 100% post-consumer recycled PET content.
- Produced within 24-48 hours.



Specifications

- YARN: Continuous filament PET yarn with 100% post-consumer recycled content.
- YARN WEIGHT: 900 gr/m².
- PILE THICKNESS: 11mm.
- STATIC CONTROL: ISO 6356 (2012) Determination of the static electrical propensity walking test: -0.3 kVolts. Satisfies IBM test requirements.
- TOTAL WEIGHT: 2.90 kg/m².
- PRIMARY BACKING: Freudenberg F 0 LUTRADURE 2 Polyester Spun bound Non woven Fabric 130gr/m².
- RUBBER BACKING: 100% Nitrile EXS™ rubber for maximum oil resistance, weight reduction, and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- FLAMMABILITY: Passes BS 4790 (1987) determination of the flammability of textile floor coverings: Low radius of effects of ignition.
- Available with or without rubber border.
- Also available in 3 mm rubber backing
- Backing options: Smooth or claw backing



REQUEST SAMPLE ▶

Product No. 745



Standard Sizes (cm)	Recycled bottles
60 x 85	33
75 x 85	41
85 x 115	62
85 x 150	82
85 x 300	164
115 x 180	132
115 x 200	147
115 x 240	176
115 x 250	192
115 x 300	221
150 x 200	192
150 x 240	230
150 x 250	240
150 x 300	288
200 x 200	256
200 x 300	384

Maximum size: 200 x 550 cm
Size Tolerance: +/- 2%






Cleaning Instructions

Colorstar® mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.

Mats should always be dry before they are placed back in service.

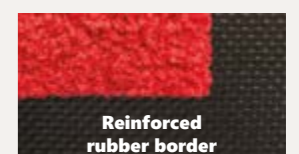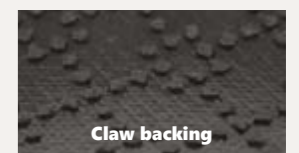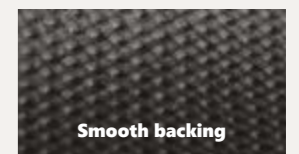



COLORSTAR® SPECIAL SHAPE

Image / Wiper / Dust control / Indoor

- **HIGH-QUALITY PRINT** | Logos and designs are digitally printed; fine details, shading, and 3D images can be achieved; 66 standard color options available.
- **INCREDIBLE STAIN RESISTANCE** | no cross staining, easy to clean.
- **RECYCLED CONTENT** | Yarn contains 100% post-consumer recycled PET content.
- Produced within 24-48 hours.



Product No. 747



Standard Sizes (cm)	Recycled bottles
60 x 85	33
75 x 85	41
85 x 115	62
85 x 150	82
85 x 300	164
115 x 180	132
115 x 200	147
115 x 240	176
115 x 250	192
115 x 300	221
150 x 200	192
150 x 240	230
150 x 250	240
150 x 300	288
200 x 200	256
200 x 300	384

Maximum size: 200 x 550 cm
Size Tolerance: +/- 2%

Specifications

- YARN: Continuous filament PET yarn with 100% post-consumer recycled content.
- YARN WEIGHT: 900 gr/m².
- PILE THICKNESS: 11mm.
- STATIC CONTROL: ISO 6356 (2012) Determination of the static electrical propensity walking test: -0.3 kVolts. Satisfies IBM test requirements.
- TOTAL WEIGHT: 2.90 kg/m².
- PRIMARY BACKING: Freudenberg F 0 LUTRADURE 2 Polyester Spun bound Non woven Fabric 130gr/m².
- RUBBER BACKING: 100% Nitrile EXS™ rubber for maximum oil resistance, weight reduction, and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- FLAMMABILITY: Passes BS 4790 (1987) determination of the flammability of textile floor coverings: Low radius of effects of ignition.
- Available with or without rubber border.
- Also available in 3 mm rubber backing
- Backing options: Smooth or claw backing



REQUEST SAMPLE ▶






Colorstar® mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.

Mats should always be dry before they are placed back in service.

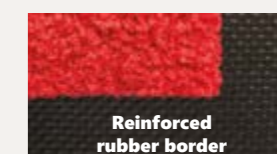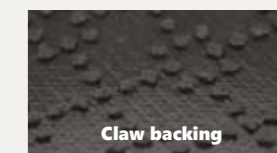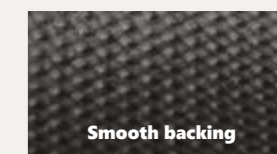




OPTIGRAFIC

Image / Wiper / Dust control / Indoor

- Premium tufted logo mats offer superior colour-fastness and wash-fastness.
- High twist heat set Nylon yarn resists crushing and traps dirt and moisture.
- Fade resistant – Solution dyed nylon is impervious to bleach and UV Resistant.
- Fully launderable.

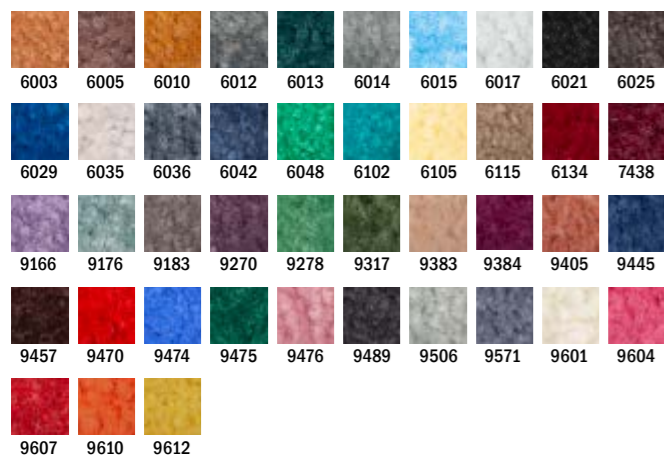

Product No. 7415, 7437, 7428, 7438, 7439



Standard Sizes (cm)
60 x 85
75 x 85
80 x 120
85 x 150
85 x 300
120 x 180
120 x 200
120 x 240
150 x 200
150 x 250
150 x 300

Maximum size: 240 cm x 550 cm or 200 cm x 1.000 cm
 Maximum 6 colours per design
 Size Tolerance: +/- 2%

Specifications

- YARN: Continuous filament Solution Dyed Nylon Type 6
- WEIGHT: 1.000 g/m² PILE HEIGHT: 11,3 mm
- TOTAL WEIGHT: 3.2kg/m²
- PRIMARY BACKING: Polyester Spun bound Non-woven Fabric 120g/m²
- RUBBER BACKING: 100% Nitrile EXS Rubber. Compression-molded with reinforced borders for excellent dimensional stability and lay-flat properties
- RUBBER BODY THICKNESS: 1.7mm
- RUBBER BORDER THICKNESS: 3mm
- BORDER WIDTH: 1.5mm
- Available with or without rubber border
- Also available in 3.1 mm rubber backing
- Backing options: Smooth or claw backing



[REQUEST SAMPLE ▶](#)





Cleaning Instructions

Optigrafic mats can be cleaned in several different ways.
 They can be commercially laundered (see Laundering Instructions)

1. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
2. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.
 Mats should always be dry before they are placed back in service.

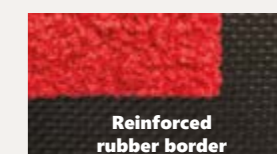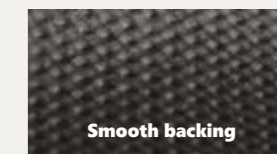




OPTIBRUSH

Image / Scraper / Wiper / Indoor / Outdoor

- Durable Nylon Brush monofibers make for excellent scraping action.
- Solution Dyed fibers for 100% UV-resistance.
- Bleach and chemical resistant.
- Optional drainage holes allow for excellent drainage.



Specifications

- YARN: Coarse Continuous filament Solution Dyed Nylon.
- YARN WEIGHT: 1,300 g/m².
- PILE THICKNESS: 10mm.
- TOTAL WEIGHT: 5,20 kg/m².
- PRIMARY BACKING: Polyester Spun bound Non-woven Fabric 120g/m².
- RUBBER BACKING: 100% Nitrile EXS™ rubber with high UV resistance and high resistance to carbon bleeding. Compression-molded with claw backing for excellent dimensional stability.
- BORDER THICKNESS: 2.9mm
- BORDER WIDTH: 1.5cm
- Available with or without rubber border.



REQUEST SAMPLE ►

Product No. 7418, 7446, 7424, 7449



Standard Sizes (cm)
60 x 85
75 x 85
80 x 120
85 x 150
85 x 300
120 x 180
120 x 200
120 x 240
150 x 200
150 x 250
150 x 300



Maximum size: 200x1000 cm or 240x550 cm
 Maximum 2 colours per design
 Size Tolerance: +/- 2%



Optibrush mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.
 Mats should always be dry before they are placed back in service.

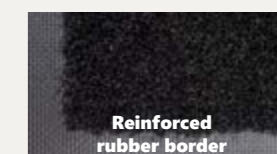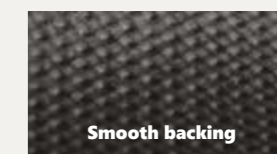



SUPERSCAPE™ IMPRESSIONS PLUS

Image / Slip-resistant / Scraper / Indoor / Outdoor

- **CLEAN** | Surface cleats effectively remove and trap dirt and sand below shoe level to prevent tracking.
- **SAFE** | Certified high-traction by the National Floor Safety Institute (NFSI).
- **EASY TO CLEAN** | Lightweight flexible design ensures easy handling and cleaning (shake off soil and hose off); can be commercially laundered.
- **MADE IN BELGIUM** | Mat sizes are approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.



Product No. 4551




Standard Sizes (cm)	Maximum logo size (cm)
75 x 85	55 x 65
85 x 150	65 x 130
115 x 180	95 x 160
150 x 250	110 x 230


Size Tolerance: +/- 5%

Specifications

- TYPE: Nitrile Rubber.
- THICKNESS: 4mm.
- WEIGHT: 4.1kg/m².
- DUROMETER: 65.
- TENSIL: 1600.
- NUB DESIGN: Round.Molded rubber pattern on face provides traction under wet conditions and scrapes heavy soil from soles of shoe.
- Heavy weight helps keep the mat in place.
- Nitrile rubber construction allows for use in environments that are exposed to animal fats and petroleum products.
- Good anti-fatigue properties.
- Slip-resistant surface.

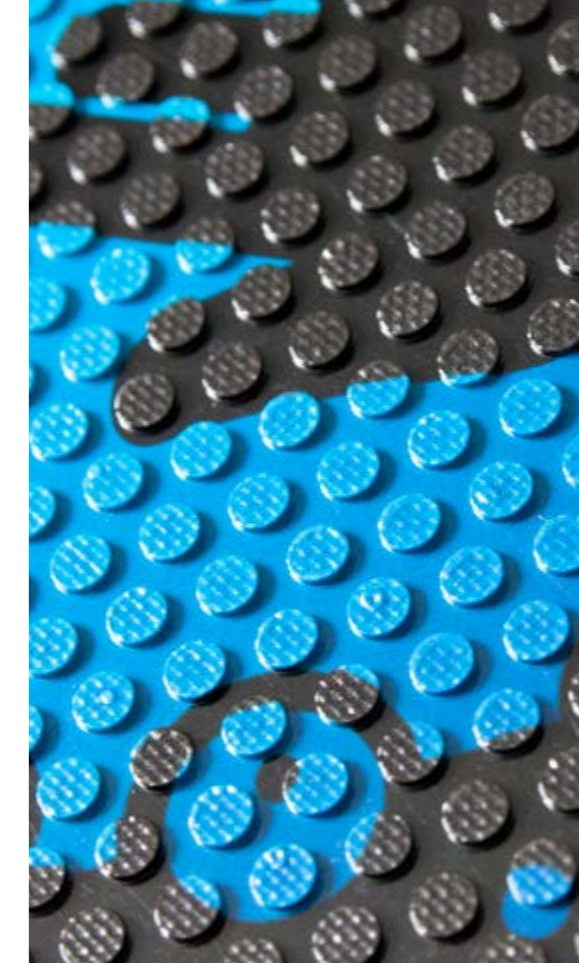

[REQUEST SAMPLE ▶](#)

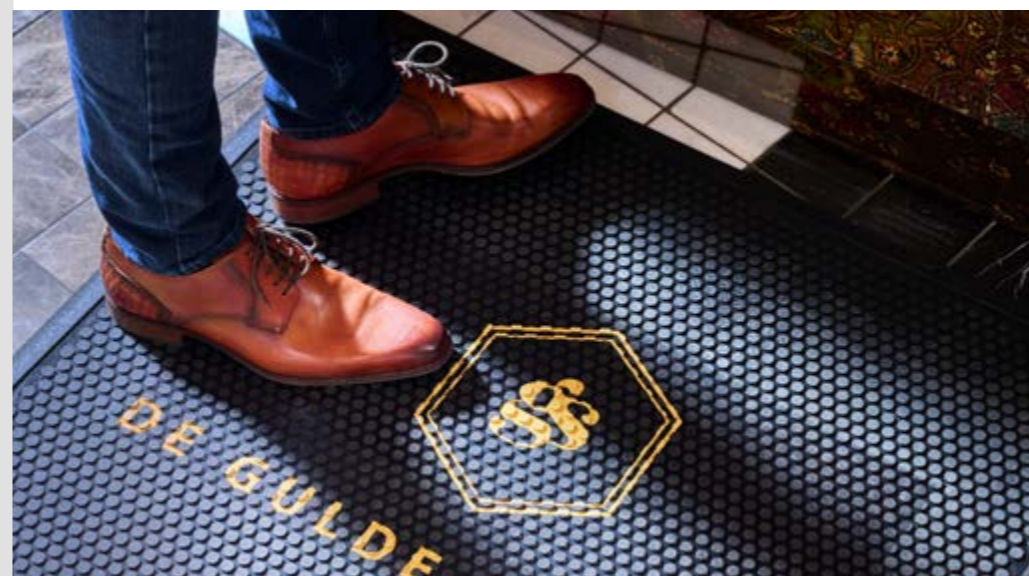

Superscape™ Impressions mats can be commercially laundered (see laundering instructions) or cleaned using the instructions below.

1. Scrub with a deck brush (when needed) using detergent with a neutral pH.
2. Rinse with a hose or pressure washer.
3. Lay flat or hang to dry.



BERBER IMPRESSIONS

Image / Indoor

- **DURABLE** | The tight weave of Berber makes it durable enough to withstand heavy foot traffic while scraping dirt and moisture from shoes to minimize tracking.
- **HIGH DEFINITION** | The Berber fabric features a smooth surface that allows for crisp printing definition.
- **ECO-FRIENDLY** | These mats are made with PET (polyethylene terephthalate), a type of polyester yarn that features 85% recycled content reclaimed from plastic drink bottles.
- **EASY TO CLEAN** | PET fabric is naturally resistant to staining.



Specifications

- SURFACE FIBRE: PET (polyethylene terephthalate) with 85% recycled content
- WEIGHT: 1492g/m²Total Weight: 3400 g/m²
- CONSTRUCTION: Needle-punched
- DESIGN: Hobnail
- BACKINGMATERIAL: NBR Rubber - smooth or universal cleated
- THICKNESS: 1,5 mm with 2,5 mm reinforced borders
- Available with or without rubber border



Product No. 4383, 4382



Standard Sizes (cm)
60 x 85
85 x 115
85 x 150
85 x 300
115 x 180
115 x 300
150 x 240
150 x 300
180 x 300
180 x 360

Special size: 180cm width by 360cm length
Please note, mat size is approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.



[REQUEST SAMPLE ►](#)

Berber Impressions mats can be cleaned using the instructions below:

1. Vacuum regularly (daily in high-traffic areas; weekly in lower traffic areas).
2. Extract or hose off as needed to remove heavy soil/debris.

Hang mat to dry.
Always make sure the mat is dry before placing it back in service.



CHAIR MATS IMPRESSIONS

Image / Floor Protector / Indoor

- **HIGH-QUALITY PRINT** | Logos and designs are digitally printed; fine details, shading, and 3D images can be achieved.
- **GLIDES EASILY** | Your chair will glide easily over the firm but beautiful surface.
- **SKID-RESISTANT FLOOR PROTECTION** | The durable rubber backing protects your floors and keeps your mat from sliding.
- **EASY TO CLEAN** | The stain-resistant PET surface can be vacuumed and/or wiped clean with mild detergent.
- Designed for placement on hard floors (will work on low-pile carpet, but not designed for anything softer)



80 Standard color options

Specifications

- SURFACE Material: Knitted PET (polyethylene terephthalate) BACKING Material: SBR rubber (20% Recycled content)
- OVERALL MAT THICKNESS: 4 MM
- Choose from 150 standard color options.



[REQUEST SAMPLE ▶](#)

Product No. 32765



Product No. 2384



Standard Sizes (cm)



120 x 90

Size Tolerance: +/- 5%



Desk chair mats can be cleaned using the instructions below:

1. Vacuum as needed.
2. Spot clean with mild detergent.

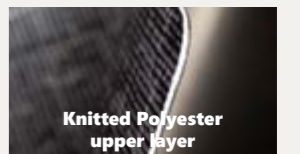



PREMIUM BAR & COUNTER MAT


Promo / Indoor

- The perfect product for point of purchase visibility.
- Photographic HD Sublimation Print Quality.
- High Quality, knitted polyester surface.
- 100% Nitrile rubber Anti-slip Backing.



Specifications

- Carpet: Printed Knitted Non-Pill Polyester
- Rubber: Nitrile Rubber
- OVERALL WEIGHT: 1.56kg/m²
- STANDARDS & TESTING Electrostatic Propensity: The electrostatic conductivity is below the 2KV threshold of human sensitivity @45% relative humidity/20°C
- Flame Retardancy: Passes standards for BS 4790:1987 (Hot Metal Nut) – Low radius of effects of ignition. EN 13501-1 Bfl-s1
- Available with or without rubber border

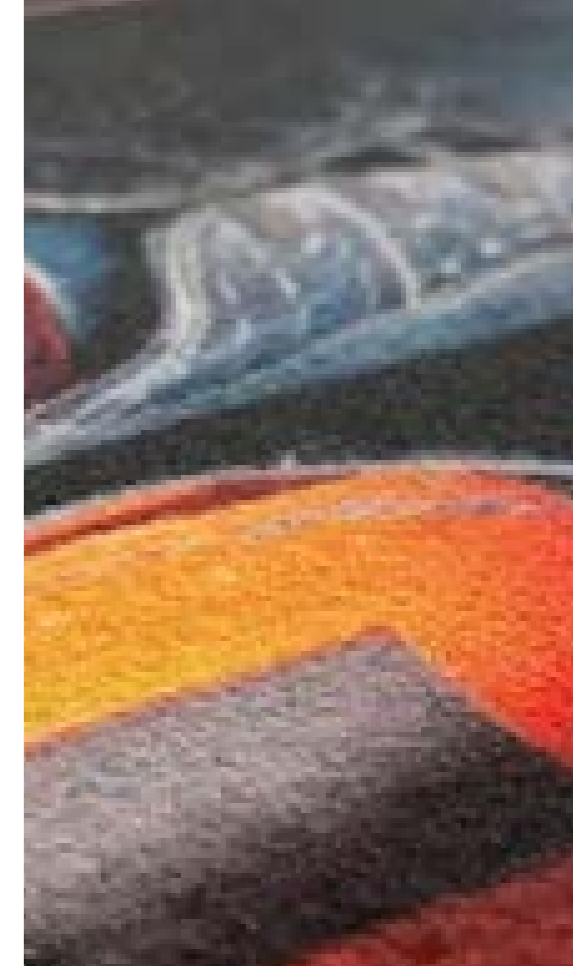

[REQUEST SAMPLE ►](#)

Product No. 7801



Standard Sizes (mm)

190 x 600
234 x 434
244 x 894



Bar Runners can be cleaned by two different ways:

They can be rinsed off under the sink.


They can be washed at home in a standard washing machine under 30°C.



PROMO FLOOR MAT

Promo / Indoor


- The perfect product for point of purchase visibility.
- Photographic HD Sublimation Print Quality.
- High Quality, knitted polyester surface.
- 100% Nitrile rubber Anti-slip Backing.

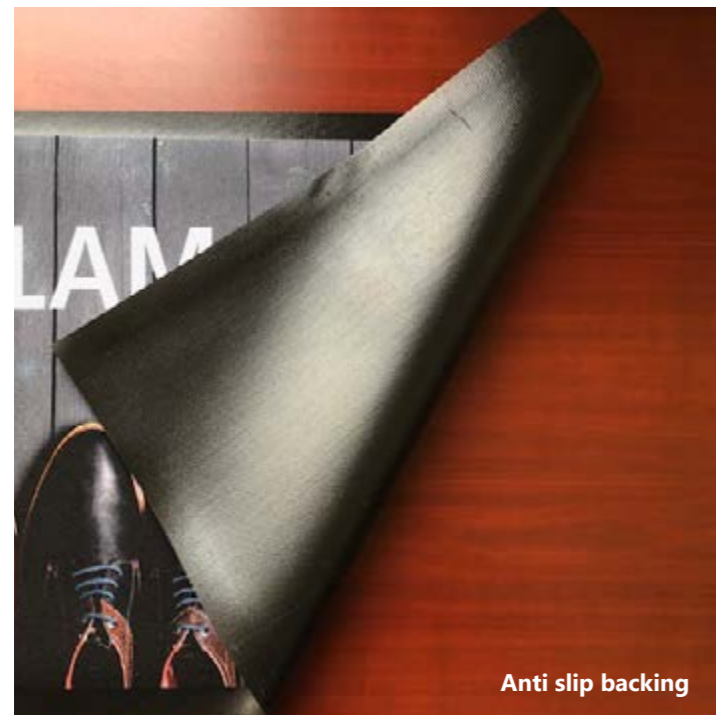

Anti slip backing

Specifications

- Carpet: Printed Knitted Non-Pill Polyester
- Rubber: Nitrile Rubber
- OVERALL WEIGHT: 2kg/m²
- Electrostatic Propensity: The electrostatic conductivity is below the 2KV threshold of human sensitivity @45% relative humidity/20°C
- Flame Retardancy: Passes standards for BS 4790:1987 (Hot Metal Nut) – Low radius of effects of ignition. EN 13501-1 Bfl-s1
- Available with or without rubber border

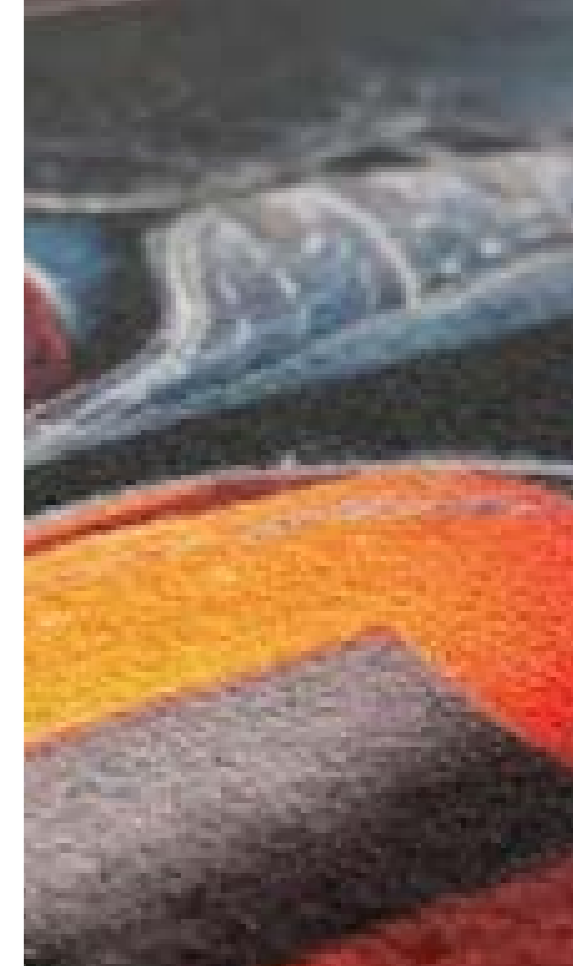

Product No. 7809



Standard Sizes (cm)

60 x 40
75 x 50
60 x 85
85 x 120
85 x 150
85 x 300
115 x 180
150 x 300



Postermats can be cleaned by two different ways:

They can be rinsed off under the sink.

They can be washed at home in a standard washing machine under 30°C


[REQUEST SAMPLE ►](#)



COUNTER IMPRESSIONS

Image / Indoor

- **HYGIENIC** | Easy to clean wipeable surface.
- **CONTAINMENT** | Tactile dimpled design for added protection against spillages.
- **VIBRANT COLOUR REPRODUCTION** | Full colour, photographic quality, edge to edge print as standard; offering exceptional visibility for any design.
- **MADE IN EUROPE** | Manufactured in Europe with no mould charges, low minimum order quantities and fast lead times.

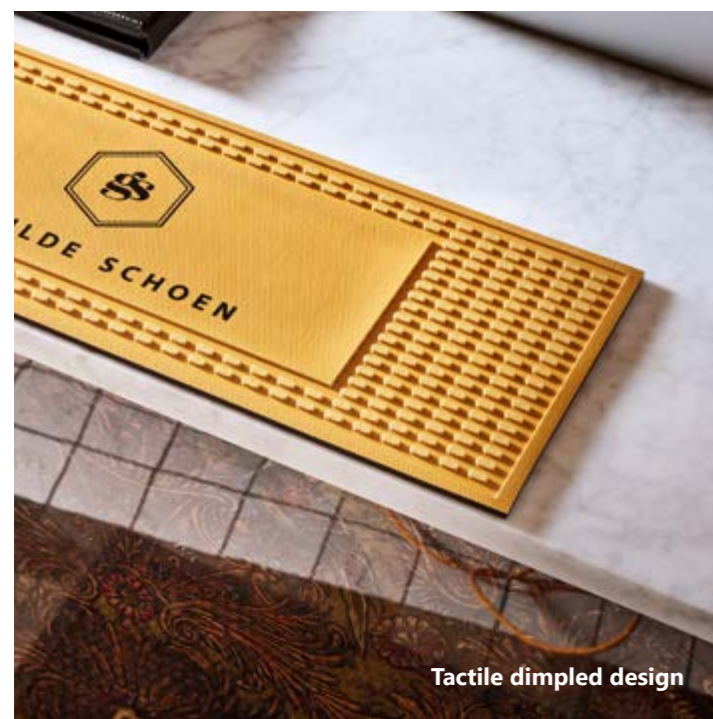

Tactile dimpled design

Specifications

- **SURFACE:** Flexible, durable, wipe clean thermoplastic printed in your choice of full colour design with flexible inks. Standard dimpled pattern for liquid containment.
- **RUBBER BACKING:** 100% Nitrile EXS™ rubber for maximum oil resistance, weight reduction and flexibility.



[REQUEST SAMPLE ▶](#)

Product No. 4190



Standard Sizes (mm)
100 x 500
200 x 550
355 x 355

Size Tolerance: +/- 2 %
Thickness: 4 mm



Counter Impressions Mats are a wipeable counter solution.

Simply empty liquids and wash with warm soapy water or wipe clean using standard counter cleaning products and leave to dry.

STANDARD MATS





CLASSIC BRUSH™

Wiper / Dust Control / Indoor / Outdoor

- **SUPERIOR DIRT-STOPPING POWER** | Course nylon fibers scrape and wipe dust and dirt from shoes.
- **RESILIENT** | High-twist, heat-set nylon resists crushing to better trap dirt and extend the useful life of the mat.
- **FADE RESISTANT** | Solution-dyed nylon won't fade in sunlight or with repeated washing; impervious to bleach.



Onyx Brush

Specifications

- YARN: Rhodia Solution Dyed Nylon, Type 6,6; Continuous Filament, Type 6 Nylon.
- YARN WEIGHT: 895 gr/m².
- PILE THICKNESS: 10mm.
- TOTAL WEIGHT: 3,0 kg/m².
- PRIMARY BACKING: Freudenberg Polyester Spunbound Non-woven Fabric 130 gr/m².
- RUBBER BACKING: 100% Nitrile EXS rubber for maximum oil resistance, weight reduction, and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- Available with or without rubber border
- Also available in 3 mm rubber backing



REQUEST SAMPLE ▶

Product No. 4584



Standard Sizes (cm)

60 x 85
75 x 85
85 x 115
85 x 150
85 x 300
115 x 180
115 x 200
115 x 240
115 x 250
115 x 300
150 x 200
150 x 240
150 x 250
150 x 300


Special sizes available in 85, 115 and 150 widths up to 550 cm in length
Size variation: +/- 2%




Classic Brush™ mats can be cleaned in several different ways.

1. Commercially laundered (see Laundering Instructions)
2. Vacuumed regularly: daily in high-traffic areas, weekly in lower-traffic areas.
3. Cleaned with an extractor and laid flat to dry.


Mats should always be dry before they are placed back in service and cooled before rolling.

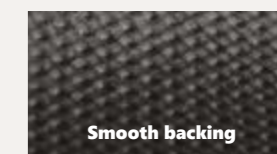

Smooth backing

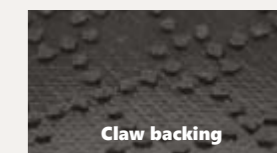

Claw backing

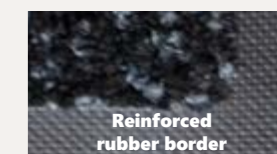


Reinforced rubber border



CRYSTAL COTTON

Wiper / Dust Control / Indoor

- Blended fibers of 50% cotton and 50% polyester offer excellent absorption and dust control properties.
- Plush 1.050 gr/m² carpeted surface is perfect for stopping damaging dirt and moisture from entering facilities.
- 100% Nitrile EXS Rubber backing prevents curling and cracking in all types of weather.
- Fully launderable.



Anthracite

Brown



Specifications

- YARN: 50% Polyester / 50% Cotton.YARN WEIGHT: 1050 gr/m².
- PILE THICKNESS: 10mm.TOTAL WEIGHT: 3,05 kg/m².
- PRIMARY BACKING: Polyester Spunbound Non-woven Fabric 130 gr/m².
- RUBBER BACKING: 100% Nitrile EXS rubber for maximum oil resistance, weight reduction, and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- Available with or without rubber border
- Also available in 3 mm rubber backing




Product No. 454



Standard Sizes (cm)

60 x 85
75 x 85
85 x 115
85 x 150
85 x 300
115 x 180
115 x 200
115 x 240
115 x 250
115 x 300
150 x 200
150 x 240
150 x 250
150 x 300

Maximum size: 150 x 550 cm
Size Tolerance: +/- 2%


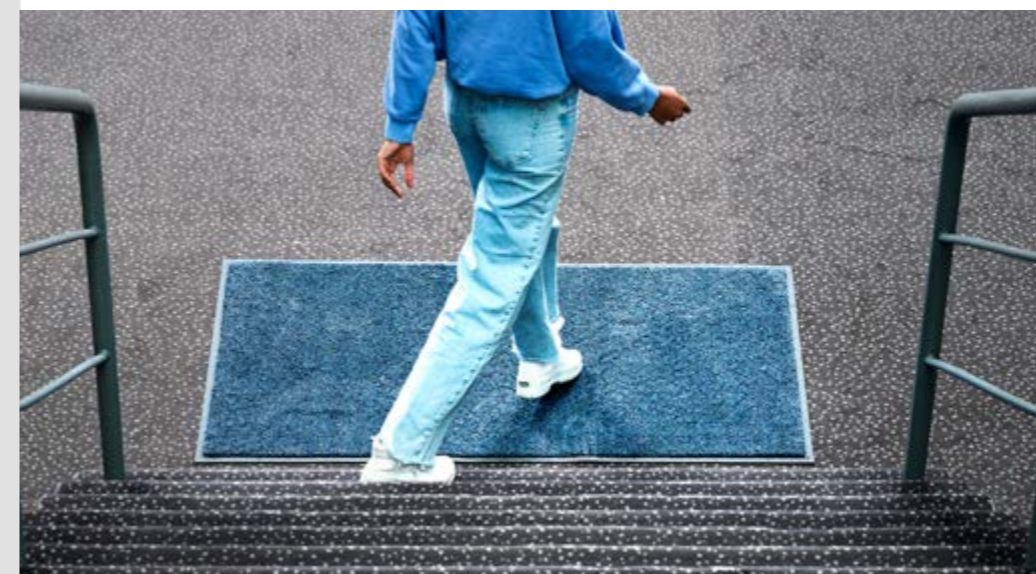


REQUEST SAMPLE ►

Crystal mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.
4. Hang to dry.

Mats should always be dry before they are placed back in service.

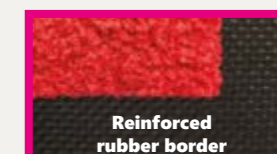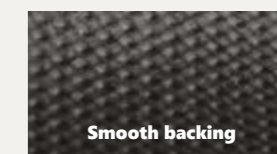




CLASSIC SOLUTIONS

Wiper / Dust Control / Indoor

- Solution-dyed nylon fibers provide superior colour and wash fastness.
- LUTRADUR primary substrate will not fray, reduces linting, and provides a strong bond between the rubber and the carpet.
- High Twist heat set nylon fibers are resistant against crushing and allow dirt to filter into the mat rather than remaining on top of the carpeted surface.
- Bleach / UV resistant.

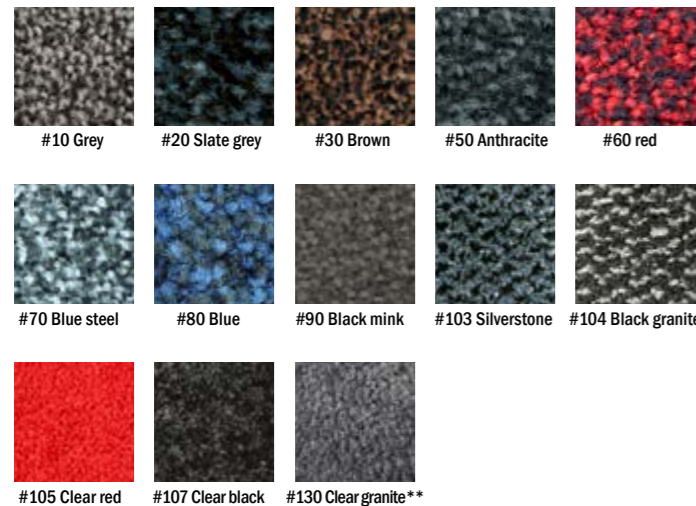

Specifications

- YARN: Continuous Filament Solution Dyed Nylon, Type 6 Nylon.
- TWIST: Each strand of yarn contains two plies of fiber that have been twisted individually 5.5 turns per 2.5cm and then twisted together at 4.5 turns per 2.5cm. The yarn is then heat set to permanently maintain the hard twist.
- YARN WEIGHT: 820gr/m².
- PILE THICKNESS: 10mm.
- STATIC CONTROL: Rated at less than 1KV on AATCC134 electrostatic propensity test. Satisfies IBM test requirements.
- TOTAL WEIGHT: 2.82 kg/m².
- PRIMARY BACKING: Freudenberg LUTRADUR Polyester Spun bound Non-woven Fabric 130gr/m².
- RUBBER BACKING: 100% Nitrile rubber for maximum oil resistance, weight reduction, and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- FLAMMABILITY: Passes standards for EN ISO 9239-1 (2010)
- Available with or without rubber border
- Also available in 3 mm rubber backing



Product No. 453



Standard Sizes (cm)

60 x 85
75 x 85
85 x 115
85 x 150
85 x 300
115 x 180
115 x 200
115 x 240
115 x 250
115 x 300
150 x 200
150 x 240
150 x 250
150 x 300
200 x 200*
200 x 300*

Maximum size: 150 x 550 cm
Size Tolerance: +/- 2%






REQUEST SAMPLE ►

Cleaning Instructions

Classic Solutions mats can be cleaned in several different ways.

1. Commercially laundered (see Laundering Instructions)
2. Vacuumed regularly: daily in high-traffic areas, weekly in lower-traffic areas.
3. Cleaned with an extractor and laid flat to dry.

Mats should always be dry before they are placed back in service and cooled before rolling.

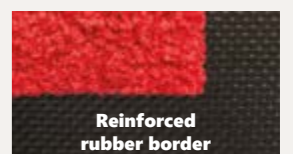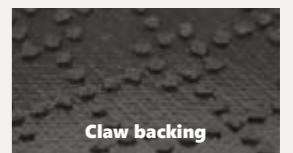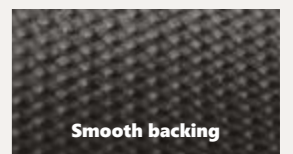




MICROLUXX™

Wiper / Dust Control / Indoor


- **SUPERIOR MOISTURE & DUST CONTROL** | Unique "microfiber" blend absorbs and retains 2,5 times more moisture and dust than standard carpeted mats.
- **RESILIENT** | High-twist, heat-set nylon resists crushing to better trap dirt and extend the useful life of the mat.
- **FADE RESISTANT** | Solution-dyed nylon won't fade in sunlight or with repeated washing; impervious to bleach.
- **MADE IN BELGIUM** | Please note, mat size is approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.



#160 Stardust grey



#161 Storm granite



#162 Ocean blue

Product No. 4120



Standard Sizes (cm)
60 x 85
75 x 85
85 x 115
85 x 150
85 x 300
115 x 180
115 x 200
115 x 240
115 x 250
115 x 300
150 x 200
150 x 240
150 x 250
150 x 300

Size Tolerance: +/- 2%

Specifications

- YARN: Continuous Filament Solution Dyed Nylon, Type 6 Nylon Microluxx™ Solution Dyed Nylon.
- YARN WEIGHT: 1112 gr/m².
- PILE THICKNESS: 12mm.
- STATIC CONTROL: Rated at less than 1KV on AATCC134 electrostatic propensity test. Satisfies IBM test requirements.
- TOTAL WEIGHT: 3,112 kg/m².
- PRIMARY BACKING: Freudenberg Polyester Spunbound Non-woven Fabric 130 gr/m².
- RUBBER BACKING: 100% Nitrile EXS rubber for maximum oil resistance, weight reduction and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- FLAMMABILITY: Passes standards for BS 4790: Flammability of floor coverings
- Available with or without rubber border
- Also available in 3 mm rubber backing






REQUEST SAMPLE ▶

Microluxx™ mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor and laid flat to dry.

Mats should always be dry before they are placed back in service, and cooled before rolling.

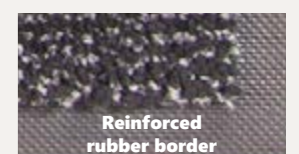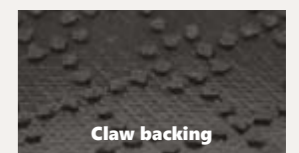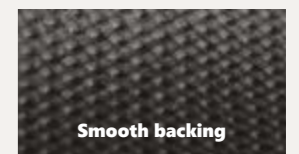




SUPERSCAPE

Scraper / Indoor / Outdoor

- Textured slip resistant surface effectively removes dirt and soil.
- 100 % Nitrile Rubber is resistant to chemicals, greases and oils.
- Perfect for use outside of entrances as a scraper mat or as a slip resistant mat in wet areas.

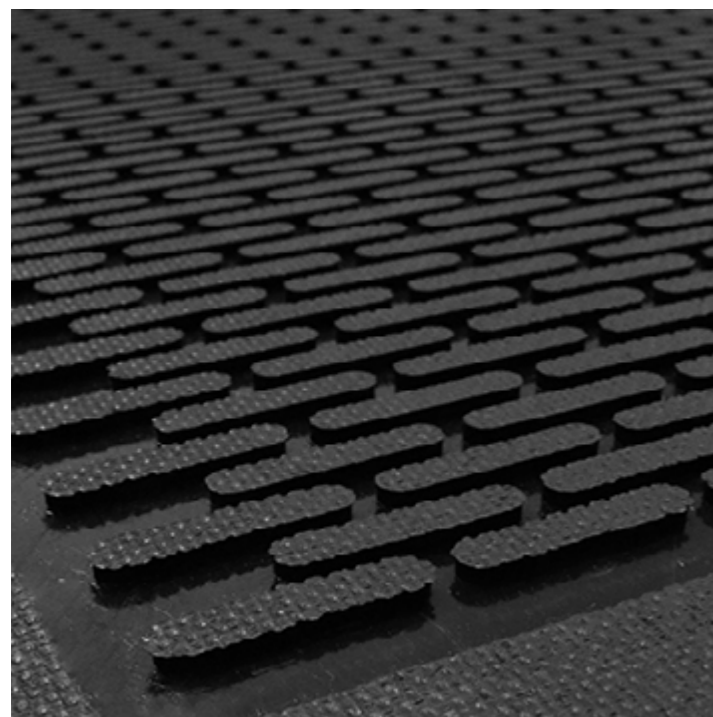

Specifications

- TYPE: Nitrile Rubber.
- THICKNESS: 4mm.
- WEIGHT: 4.1kg/m².
- DUROMETER: 65.
- TENSIL: 1600.
- NUB DESIGN: Oblong, Molded rubber pattern on the face provides traction under wet conditions and scrapes heavy soil from soles of the shoe.
- Heavy weight helps keep mat in place.
- Nitrile rubber construction allows for use in environments that are exposed to animal fats and petroleum products.
- Good anti-fatigue properties.
- Slip-resistant surface.
- Ideal for outside entrances, inclines, restaurants, production areas, and locker rooms



Product No. 4585



Standard Sizes (cm)

75 x 85
85 x 150
115 x 180

Size Tolerance: +/- 5%



Cleaning Instructions

SuperScrape Impressions mats can be commercially laundered (see laundering instructions) or cleaned using the instructions below.

Scrub with a deck brush (when needed) using detergent with a neutral pH.

Rinse with a hose or pressure washer.

Lay flat or hang to dry.



WATERHOG[®] CLASSIC

Scraper / Wiper / Indoor / Outdoor

- **CLEAN & DRY** | Bi-level surface effectively scrapes dirt and moisture from shoes, trapping it beneath shoe level to prevent tracking; water dam border holds moisture keeping it off your floors (WaterHog[®] mats can hold up to 4 liters of water per square meter).
- **DURABLE** | Reinforced rubber nubs prevent pile from crushing and extend the performance life of the mat.
- **SAFE** | Beveled edges provide a safe transition from floor to mat; certified high-traction by the National Floor Safety Institute (NFSI).



#54 Charcoal



#57 Medium grey



#56 Medium blue



#50 Camel



Rubber reinforced textile

Rubber border

Product No. 4270, 4280



Standard Sizes (cm)

60 x 90
90 x 150
115 x 180*
180 x 250*

Size Tolerance: +/- 2%

*Camel only available in 60x90 and 90x150

Specifications

- CARPET TYPE: Needle-Punched, Solution-dyed, postconsumer recycled PE.T.
- CARPET WEIGHT: 820 gr/m²RUBBER NUB HEIGHT: 6,4mm
- PATTERN: Waffle & Diamond
- BACKING TYPE: Rubber backing, Nitril EXS Rubber 3,63 mm – Border 1.98 mm – Body
- TOTAL WEIGHT: 2,80 kg/m²
- Reinforced face NUBS: Face Nubs are reinforced with rubber to resist crushing, maintaining high performance and extending product life.
- Raised NUB surface: Removes and traps dirt and moisture, holding it on the mat below shoe level so they are not tracked onto floors.
- Indoor/Outdoor: Durable anti-static PE.T. face suitable for indoor or outdoor use.
- PE.T. fiber system dries quickly.
- Rubber Backing is PVC-Free.
- Not adversely affected by salt or ice melt.
- Colorfast: Solution dyed for excellent color fastness.
- Passes Flammability Standard of carpets and rugs FF-2-70.
- Anti-Static Border




[REQUEST SAMPLE](#) ►



Cleaning Instructions

1. **NOT LAUNDERABLE** in commercial washers.
2. **Vacuum regularly:** Daily in high traffic areas, weekly in lower traffic areas.
3. **Extract, clean or hose off** as needed to remove heavy soil.
4. **Hang mats to dry.**


Mats should be dry before placing back in service.

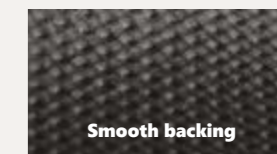

Smooth backing



Claw backing

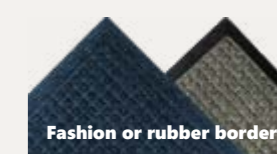



Fashion or rubber border




WATERHOG[®] DIAMOND

Scraper / Wiper / Indoor / Outdoor

- **CLEAN & DRY** | Bi-level surface effectively scrapes dirt and moisture from shoes, trapping it beneath shoe level to prevent tracking; water dam border holds moisture keeping it off your floors (WaterHog[®] mats can hold up to 4 liters of water per square meter).
- **DURABLE** | Reinforced rubber nubs prevent pile from crushing and extend the performance life of the mat.
- **SAFE** | Beveled edges provide a safe transition from floor to mat; certified high-traction by the National Floor Safety Institute (NFSI).

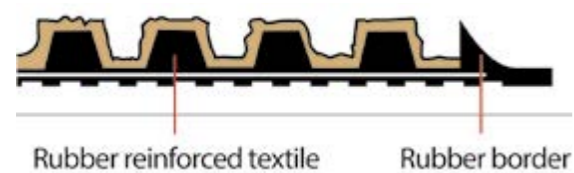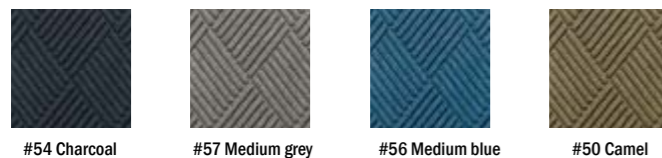

Product No. 4208, 4228

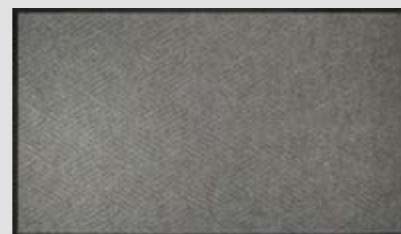

Standard Sizes (cm)

60 x 90
90 x 150
115 x 180*
180 x 250*

Size Tolerance: +/- 2%

*Camel only available in 60x90 and 90x150

Specifications

- CARPET TYPE: Needle-Punched, Solution-dyed, postconsumer recycled PE.T.
- CARPET WEIGHT: 820 gr/m²RUBBER NUB HEIGHT: 6,4mm
- PATTERN: Waffle & Diamond
- BACKING TYPE: Rubber backing, Nitril EXS Rubber 3,63 mm – Border 1.98 mm – Body
- TOTAL WEIGHT: 2,80 kg/m²
- Reinforced face NUBS: Face Nubs are reinforced with rubber to resist crushing, maintaining high performance and extending product life.
- Raised NUB surface: Removes and traps dirt and moisture, holding it on the mat below shoe level so they are not tracked onto floors.
- Indoor/Outdoor: Durable anti-static PE.T. face suitable for indoor or outdoor use.
- PE.T. fiber system dries quickly.
- Rubber Backing is PVC-Free.
- Not adversely affected by salt or ice melt.
- Colorfast: Solution dyed for excellent color fastness.
- Passes Flammability Standard of carpets and rugs FF-2-70.
- Anti-Static
- Border options: Fashion and rubber border
- Backing options: Smooth or claw backing




[REQUEST SAMPLE ▶](#)



Cleaning Instructions

1. **NOT LAUNDERABLE** in commercial washers.
2. Vacuum regularly: Daily in high traffic areas, weekly in lower traffic areas.
3. Extract, clean or hose off as needed to remove heavy soil.
4. Hang mats to dry.

Mats should be dry before placing back in service.

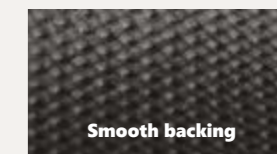




WATERHOG[®] PLUS

Scrapper / Wiper / Indoor / Outdoor

- **CLEAN & DRY** | Bi-level surface effectively scrapes dirt and moisture from shoes, trapping it beneath shoe level to prevent tracking; water dam border holds moisture keeping it off your floors (WaterHog[®] mats can hold up to 4 liters of water per square meter).
- **DURABLE** | Reinforced rubber nubs prevent pile from crushing and extend the performance life of the mat.
- **SAFE** | Beveled edges provide a safe transition from floor to mat; certified high-traction by the National Floor Safety Institute (NFSI).

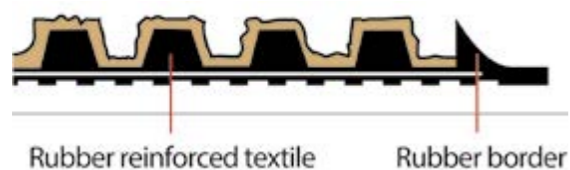

Waterdam border

Specifications

- CARPET TYPE: Needle-Punched, Solution dyed, postconsumer recycled P.E.T.
- CARPET WEIGHT: 820 gr/m²
- RUBBER NUB HEIGHT: 6,4mm
- BACKING TYPE: Rubber backing, Nitril EXS Rubber 3,63 mm – Border 1.98 mm – Body
- TOTAL WEIGHT: 2,80 kg/m² Reinforced face
- NUBS: Face Nubs are reinforced with rubber to resist crushing, maintaining high-performance, and extending product life.
- Raised NUB surface: Removes and traps dirt and moisture, holding it on the mat below shoe level so they are not tracked onto floors.
- Indoor/Outdoor: Durable anti-static P.E.T. face suitable for indoor or outdoor use.
- P.E.T. fiber system dries quickly.
- Rubber Backing is PVC-Free.
- Not adversely affected by salt or ice melt.
- Colorfast: Solution dyed for excellent light fastness.
- Passes Flammability Standard of carpets and rugs FF-2-70.
- Anti-Static.



Product No. 4600



Standard Sizes (cm)
60 X 90*
90 X 120
90 X 150*
90 X 295
115 X 175
115 x 240
175 x 360

Size Tolerance: +/- 2%

*black smoke is in stock in these sizes



[REQUEST SAMPLE ►](#)

Waterhog[®] Plus mats can be cleaned in one of three ways:

1. Commercially laundered (see Laundering Instructions)
2. Vacuum regularly (daily in high-traffic commercial areas; weekly in lower-traffic areas).
3. Extract or hose off as needed to remove heavy soil/debris.

Hang mat to dry.


Always make sure the mat is dry before placing it back in service.




WATERHOG[®] ECO PREMIER TILE

Scrapper / Wiper / Indoor / Outdoor

- **CLEAN & DRY** | Bi-level surface effectively scrapes dirt and moisture from shoes, trapping it beneath shoe level to prevent tracking; water dam border holds moisture keeping it off your floors (WaterHog[®] mats can hold up to 4 liters of water per square meter).
- **DURABLE** | Reinforced rubber nubs prevent pile from crushing and extend the performance life of the mat.
- **FADE & STAIN RESISTANT** | Solution-dyed fabric is resistant to staining, dries quickly, and will not fade or rot.
- **SAFE** | Beveled edges provide a safe transition from floor to mat; certified high-traction by the National Floor Safety Institute (NFSI).

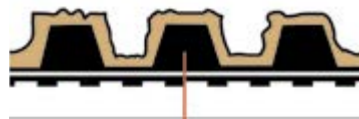

Rubber reinforced textile

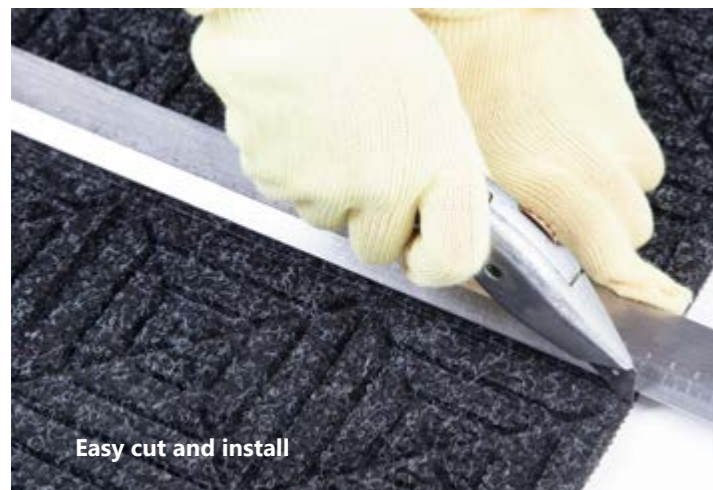


Easy cut and install

Specifications

- SURFACE TYPE: 100% Post-consumer PET Polyester fiber
- SURFACE WEIGHT: 850 gr/m²
- RUBBER NUB HEIGHT: 11,11 mm
- BACKING TYPE: 100% SBR Rubber (20% recycled content)
- BORDER THICKNESS: 1,7mm
- RUBBER NUBS: 4,83 mm
- TOTAL WEIGHT: 1,3 kg/m²
- 100% recycled fabric surface will not fade in the sun or rot in wet conditions.
- 100% resistant to bleach and sunlight.
- Heavy-Duty rubber backing is made from 20% recycled rubber content and stays in place.
- Exclusive rubber reinforced bi-level herringbone pattern effectively stores dirt and moisture beneath shoe level.
- May be free laid or glued down with solvent-free adhesives or double-sided tape.
- Easy to clean with vacuum or commercial carpet cleaning equipment.
- Not adversely affected by salt or ice melt.



Product No. 4061

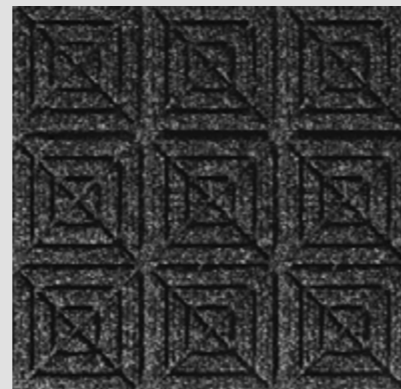

Standard Sizes (cm)

45,72 x 45,72

Sold in cases of 10

Size Tolerance: +/- 2%

*black smoke is in stock in these sizes



[REQUEST SAMPLE ▶](#)

1. NOT LAUNDERABLE in commercial washers.
2. Vacuum regularly Daily in high traffic areas, weekly in lower traffic areas.
3. Extract, clean or hose off as needed to remove heavy soil.
4. Hang mats to dry

Mats should be dry before placing back in service

ANTI-FATIGUE MATS






COMFORT FLOW™

Anti-fatigue / Slip resistant / Indoor

- **CLEAN** | Drainage holes allow liquid to flow through; lifetime anti-microbial treatment prevents odors and degradation of the mat.
- **STAYS IN PLACE** | Tacki-Back adhesive keeps mat flat and in place, even with heavy cart and buggy traffic.
- **ODOR RESISTANT** | Fabric is anti-microbially treated for lifetime protection from odor-causing bacteria.

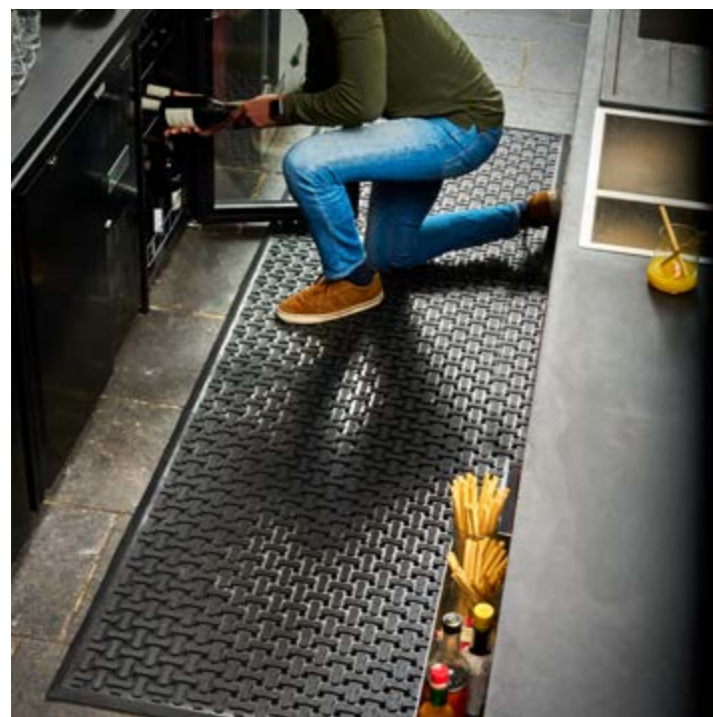


Specifications

- TYPE: Nitrile Rubber High-Density Closed Cell Foam.
- THICKNESS: 9,5mm.
- WEIGHT: 3,6 kg/m² Provides superior anti-fatigue properties for employee comfort and ergonomic benefits.
- Constructed of 100% High density, closed-cell Nitrile rubber for maximum resistance to water, oils, greases, chemicals, and animal fats.
- Lightweight, outperforms most thicker, heavier mats and is easy to clean by pressure washing or hosing off, and is also commercially launderable.
- Beveled edges around the mat help to minimize trip and fall accidents.
- Slip-resistant surface helps to reduce slip and fall accidents.
- Liquids and debris flow easily through the holes and away from shoes.
- ASTM C1028 Static Coefficient of Friction: Dry-.78 Wet-.80 U.V. Stable
- Passes Flammability Standard DOC-FF-1-70 Passes ATTCC Test Method 134-1991.
- Electrostatic Propensity of Carpets: Maximum Voltage Negative 0.3KV.
- 100% launderable and extremely durable.



REQUEST SAMPLE ▶

Product No. 4586

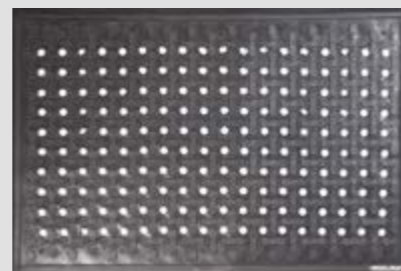

Standard Sizes (cm)

54 x 86
86 x 142
86 x 277

Size Tolerance: +/- 5%



Comfort Flow™ mats can be cleaned in several different ways.


1. Commercially laundered (see Laundering Instructions).
2. Sterilized in an autoclave.
3. Washed in a commercial dishwasher (please check your local health code for restrictions)
4. Washed by hand using the following instructions:
Scrub with a deck brush (as needed), using a detergent with a neutral pH.
Rinse with a hose or pressure washer.
Hang to dry



COMPLETE COMFORT™

Anti-fatigue / Indoor / Outdoor


- **COMFORTABLE** | 16mm thick nitrile-blended foam provides superior anti-fatigue properties.
- **CLEAN** | Anti-microbial treatment provides lifetime protection from odors and degradation.
- **SAFE** | Beveled edges provide a safe transition from floor to mat; certified high traction by the National Floor Safety Institute (NFSI).
- **EASY TO CLEAN** | Lightweight and flexible for easy handling and cleaning. Grease, oil and chemical resistant.

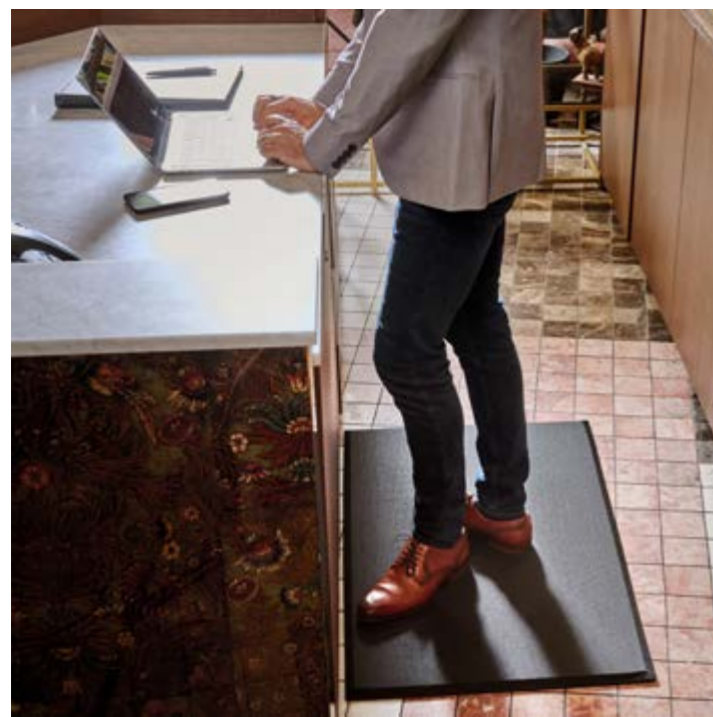

Specifications

- TYPE: Nitrile Rubber High-Density Closed Cell Foam
- THICKNESS: 16 mm
- WEIGHT: 4,8 kg/m² Provides superior anti-fatigue properties for employee comfort and ergonomic benefits.
- Constructed of 100% High density, closed-cell Nitrile rubber for maximum resistance to water, oils, greases, chemicals, and animal fats.
- Beveled edges around the mat help to minimize trip and fall accidents.
- 100% Launderable and extremely durable.
- Anti-Microbial Treated.
- Passes Flammability Standard DOC-FF-1-70. Passes ATTCC Test Method 134-1991
- Electrostatic Propensity of Carpets: Maximum Voltage Negative 0.3KV

Product No. 4941

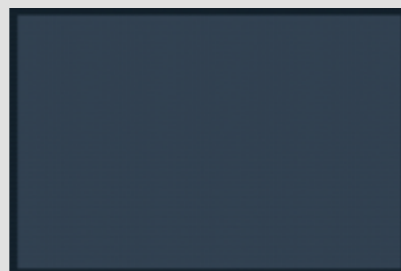

Standard Sizes (cm)

90 x 60
90 x 150
90 x 300

Size Tolerance: +/- 5%

Special sizes available: Width 90 cm Length up to 2200 (in 10 cm increments)



[REQUEST SAMPLE ▶](#)

Complete Comfort™ mats can be cleaned in two different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Washed by hand using the following instructions:
Scrub with a deck brush (as needed) using a detergent with a neutral pH.
Rinse with a hose or pressure washer, and hang to dry.



COMPLETE COMFORT™ II

Anti-fatigue / Slip-resistant / Indoor / Outdoor

- **COMFORTABLE** | 130mm thick nitrile foam provides superior anti-fatigue properties.
- **CLEAN** | Anti-microbial treatment provides lifetime protection from odors and degradation by inhibiting the growth of germs and bacteria.
- **SAFE** | Beveled edges provide a safe transition from the floor to the mat.
- **VERSATILE** | Grease/oil proof; chemical resistant; welding safe.



Specifications

- TYPE: Nitril Sponge Rubber
- THICKNESS: 13 mm Provides superior anti-fatigue properties for employee comfort and ergonomic benefits.
- Constructed of 100% High density, closed-cell Nitrile rubber for maximum resistance to water, oils, greases, chemicals and animal fats.
- Beveled edges around the mat help to minimize trip and fall accidents.
- 100% Launderable and extremely durable.
- Anti-Microbial Treated with Ultrafresh DM-25.
- Passes Flammability Standard DOC-FF-1-70

Product No. 5594



Standard Sizes (cm)

60 x 90*
90 x 115
90 x 150*
115 x 180

Size Tolerance: +/- 5%

*in stock



[REQUEST SAMPLE ►](#)

Cleaning Instructions

Complete Comfort™ mats can be cleaned in two different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Washed by hand using the following instructions:

Scrub with a deck brush (as needed) using a detergent with a neutral pH, rinse with a hose or pressure washer, and hang to dry.



HOG HEAVEN®


Anti-fatigue / Indoor / Outdoor

- Textured surface for superior slip resistance.
- Closed cell Nitrile Rubber cushion permanently molded to surface.
- Electrically conductive and welding safe.
- Rubber borders will not crack or curl.



Specifications

- SURFACE: 100% Nitrile Rubber, 3mm.
- CUSHION MATERIAL: Closed Cell Nitrile/PVC, 13mm.
- OVERALL THICKNESS: 16mm
- DUROMETER: 65
- TENSIL: 1600 PSI
- U.V. Stable.Solid Nitril Rubber Top Surface for excellent chemical resistance.
- Textured Nitrile Rubber Surface for superior slip resistance.ASTM C 1028-96
- Static Coefficient of Friction: Dry-.92 Wet-.86.
- Closed-cell Nitrile/PVC cushion backing provides lasting comfort.
- Nitrile Rubber Border remains flexible for the life of the mat and will not crack or curl.
- Cushion is permanently bonded to the Nitrile Rubber top and will not delaminate like mats with glued on the cushion.
- Passes Flammability Standard DOC-FF-1-70.Passes ATCC Test Method 134-1996
- Electrostatic Propensity of Carpets: Maximum Negative 0,7kv.

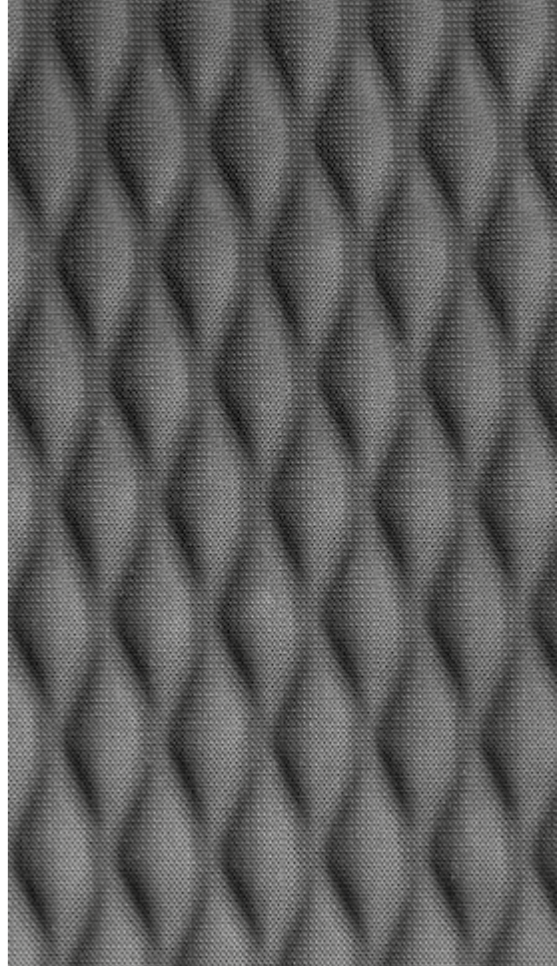

REQUEST SAMPLE ►

Product No. 4424



Standard Sizes (cm)
61 x 84
84 x 147

Size Tolerance: +/- 5%



NOT LAUNDERABLE in commercial washers.
Rinse with a hose or pressure washer .
Hang or lay out the mat to dry The mat should be laid flat during storage to prevent curling of the edges.



HOG HEAVEN® III LINKABLE TILE

Anti-fatigue / Indoor / Outdoor

- **COMFORTABLE** | High-density, closed-cell nitrile rubber cushion provides excellent anti-fatigue qualities to reduce the pain and fatigue associated with standing for long periods of time.
- **SAFE** | Certified high-traction by the National Floor Safety Institute (NFSI); beveled edges provide a safe transition from floor to mat and will not crack or curl.
- **DURABLE** | Nitrile-blended cushion provides years of useful life and is molded, not glued, to the nitrile rubber surface so it will not separate.
- **VERSATILE** | Welding safe; grease/oil resistant*; chemical resistant; ESD rating of electrically conductive (*the 100% nitrile rubber surface is grease/oil proof while the nitrile blended cushion is grease/oil resistant).




Specifications

- SURFACE OPTIONS: 100% Nitrile Rubber (20% Recycled Content), with or without grit.
- CUSHION MATERIAL: Nitrile Closed Cell Foam
- BORDERS: Yellow or Black Border
- CUSHION DENSITY: 5.5 to 7.5 lbs/ ft³
- OVERALL THICKNESS: 19.05mm
- OVERALL SIZE: Mat End 101.28x111.12cm, Mat Middle 91.44x111.12cm
- DUROMETER: 40 to 45
- TENSIL: 1100 PSI
- Provides superior anti-fatigue properties for employee comfort and ergonomic benefits.
- Water Absorption: ASTM D 1667- .01 lb/sq ft maximum.
- Temperature Use: ASTM D 1056- Cold Crack: - 6,67 °C High: 93,34 °C Intermittent exposure.
- Beveled edges around the mat help to minimize trip and fall accidents.
- Certified Slip Resistant by the National Floor Safety Institute.ASTM C1028-96
- Static Coefficient of Friction: Dry-.92 Wet-.86.
- Static Dissipative.Passes Flammability Standard DOC-FF-1-70.
- Welding Safe



[REQUEST SAMPLE ►](#)

Product No. 44498

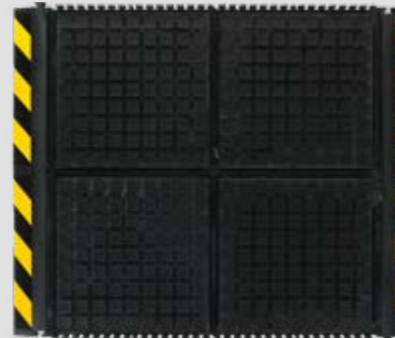

Mat Middle



Mat End

Standard Sizes (cm)

Mat End:
101,28 x 111,12
Mat Middle:
91,44 x 111,12



NOT LAUNDERABLE in commercial washers.
Rinse with a hose or pressure washer.
Hang or lay out the mat to dry.
The mat should be laid flat during storage to prevent curling of the edges.



Mat Middle



Mat End

SPECIALTY MATS





Specifications

- FIBER TYPE: Solution Dyed Polypropylene (Recycled PET Fiber)
- BACKING TYPE: SBR Rubber, 20% recycled tire rubber
- WEIGHT: 5 kg/m²
- THICKNESS: 8,6 mm
- SIZE: 115x170 mm
- MOISTURE BARRIER: Polyester Film



ANCHOR SAFE[®] LIFT TRUCK MATS


Floor Protection / Scraper / Wiper / Indoor / Outdoor

- Bi-level surface effectively removes moisture and dirt from lift truck wheels to improve lift truck safety.
- Modular mats are easy to install and scalable for the application.
- Aggressive adhesive taping system keeps tiles from moving.
- Carpet is easy to clean and fast drying.

[REQUEST SAMPLE ►](#)



Product No. 4253

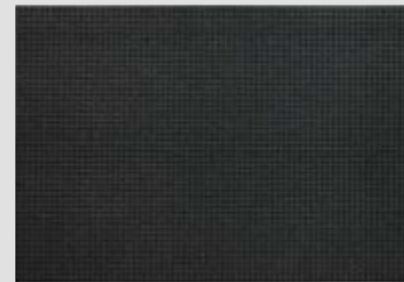


Standard Sizes (cm)

115 x 170

Cleaning Instructions

- 1. VACUUM CLEANING:** Vacuum regularly with a commercial grade vacuum - A commercialgrade wet/dry vacuum is recommended for locations that encounter snow or heavy amounts of rain.
- 2. EXTRACTION CLEANING:** Extraction cleaning with a commercial-grade machine is the preferred method for deep cleaning the mats in place - Regularly scheduled extraction cleanings performed once every 4 to 12 weeks in heavy traffic areas will help reduce dirt and wear patterns.
- 3. PRESSURE WASHING:** Pressure washing may be used for heavy cleaning - Mats should be taken outside or to an area designated for pressure wash type cleaning. The old installation type should be removed from the floor and mat - Pressure washed mats should be hung to dry.

Mats should be dry before being re-installed

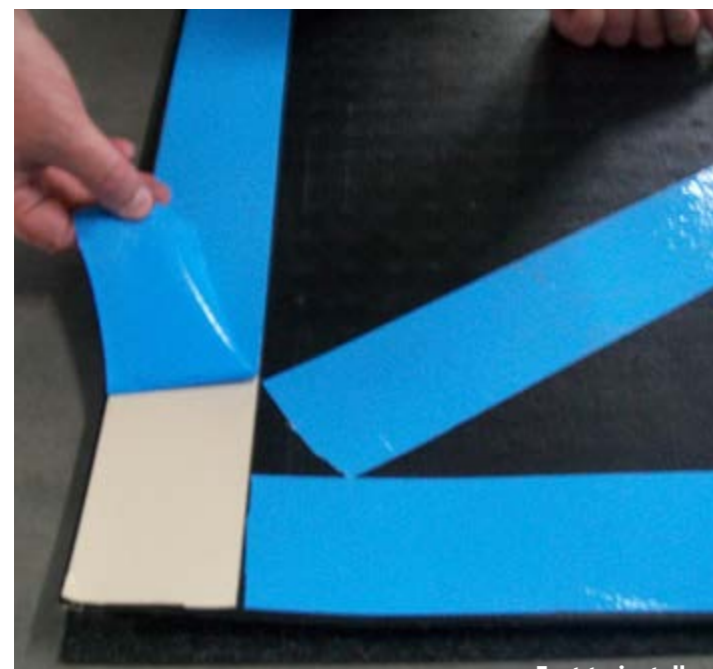

East to install



Specifications

- FIBER TYPE: Non-Woven PET (Polyester)
- BACKING TYPE: Releasable adhesive
- WEIGHT: 540 g/m²
- THICKNESS: 1,9 mm
- SIZE: 91 cm x 30,48m
- MOISTURE BARRIER: Polyester Film
- Passes Flammability Standard DOC-FF-1-70
- Water Retention: +- 38 liter per roll
- Certified High Traction by the NFSI




ANCHOR SAFE[®] ROLL GOODS


Slip-resistant / Wiper / Restroom / Absorbent / Indoor

- **KEEPS FLOORS DRY** | Retains up to 1,5 liter of water per 1 linear meter (25% more than competitive products); moisture barrier keeps liquids from soaking through to the floor.
- **STAYS IN PLACE** | Tacki-Back adhesive keeps mat flat and in place, even with heavy cart and buggy traffic.
- **ODOR RESISTANT** | Fabric is anti-microbially treated for lifetime protection from odor-causing bacteria.
- **EASY TO INSTALL** | Cut individual mats from the roll.

Product No. 4470

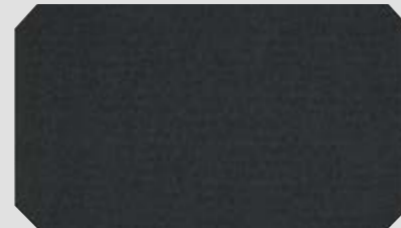

[REQUEST SAMPLE ►](#)

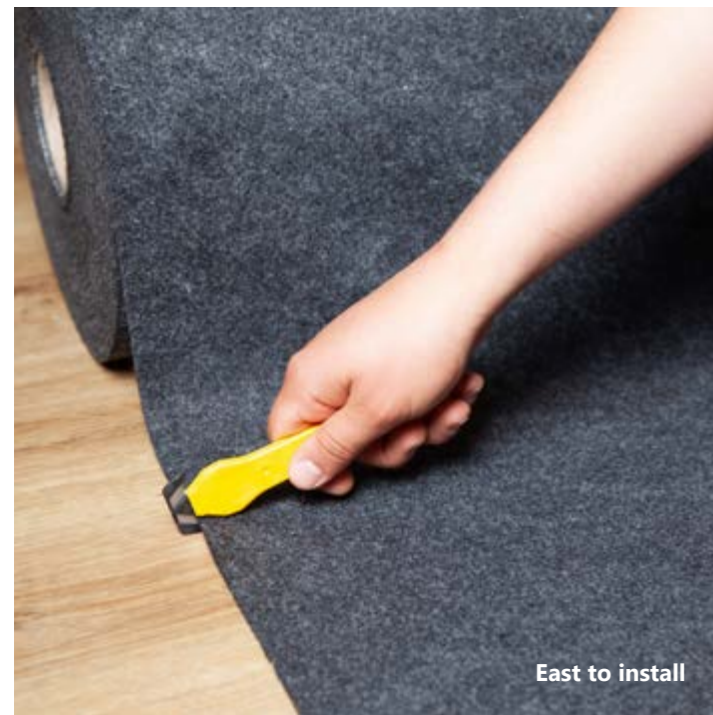

East to install

Cleaning Instructions

Do not pick up your Anchor Safe[®] Roll Goods mat to clean the floor underneath until you are ready to replace the mat.

Sure Stride[®] mats can be left in place during regular cleaning. Floor scrubbers, vacuums, brooms, and mops will pass right over without damaging the surface of the mat.

Please use low settings for water and pressure.

Tougher stains may be pre-treated with standard carpet cleaning products and agitated with a brush to loosen the soil.

Sure Stride[®] mats are designed to dry quickly, however, standard fans or floor blowers can be used to speed the drying time.

For extremely wet conditions, use a wet vac or extractor to remove water.

Anchor Safe[®] Roll Goods mats are designed to last up to 4 months under normal use. Mats should be replaced if they show signs of wear, damage, or a weakene



Specifications

- Yarn Coarse Continuous MonoFilament Solution Dyed Nylon Weight 1300 gr/m²
- PileThickness 11 mm
- Total Weight 5,2 kg/m²
- Primary Backing Freudenberg LUTRADUR™ Polyester Spun Bound Non-Woven Fabric 120 gr/m²
- Rubber 100% Nitrile rubber for maximum oil resistance, weight reduction and flexibility.
- Waterdam Border Thickness: 7,9 mm
- Body Thickness: 2,9 mm
- Border Width: 1,5 cm
- Size Variance of +/-2%

STEPWELL™ OPTIBRUSH

Scraper / Wiper / Indoor / Outdoor

- Spill Control borders allow for containment of up to 4,1/m² liter of disinfecting liquid.
- Brush fibers scrub soles clean.
- The Nitrile rubber backing offers excellent slip resistance.
- Standard sizes applicable in most doorways.



Spill control borders

Product No. 7411



Standard Sizes (cm)

75 x 85

85 x 150

Size Tolerance: +/- 2%



REQUEST SAMPLE ►

Optibrush mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas.)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.

Mats should always be dry before they are placed back in service





MESSAGE MATS HYGIÈNE

Wiper / Dust Control

- HIGH-QUALITY PRINT | The Message designs are digitally printed; fine details, shading, and 3D images can be achieved; 66 standard color options available.
- Incredible stain resistance: no cross staining, easy to clean.
- Yarn contains 100% post-consumer recycled content.
- Produced within 24-48 hours.



Specifications

- YARN: Continuous filament PET yarn with 100% post-consumer recycled content.
- YARN WEIGHT: 900 gr/m².
- PILE THICKNESS: 11mm.
- STATIC CONTROL: ISO 6356 (2012) Determination of the static electrical propensity – walking test: -0.3 kVolts. Satisfies IBM test requirements.
- TOTAL WEIGHT: 2.90 kg/m². F 0 PRIMARY BACKING: Freudenberg LUTRADURE 2 Polyester Spun bound Non-woven Fabric 130gr/m².
- RUBBER BACKING: 100% Nitrile EXS™ rubber for maximum oil resistance, weight reduction and flexibility. Compression-molded with reinforced borders on all four sides.
- BORDER THICKNESS: 2.5mm
- BODY THICKNESS: 1.5mm
- BORDER WIDTH: 2cm
- SIZE VARIANCE: +/- 2%
- FLAMMABILITY: Passes BS 4790 (1987) determination of the flammability of textile floorcoverings: Low radius of effects of ignition.



Product No. 99999



Standard sizes:
See stock designs on next pages.
Size Tolerance: +/- 2%



REQUEST SAMPLE ►

Message mats can be cleaned in several different ways.

1. They can be commercially laundered (see Laundering Instructions)
2. Vacuumed regularly (daily in high-traffic areas; weekly in lower-traffic areas)
3. Cleaned with an extractor, or hosed off as necessary to remove heavy soil.

Hang to dry.

Mats should always be dry before they are placed back in service.

Stock Messages



60 x 85 cm #3026334
85 x 115 cm #3026693
85 x 150 cm #3026695



60 x 85 cm #3026335
85 x 115 cm #3026697
85 x 150 cm #3026699



60 x 85 cm #3026333
85 x 115 cm #3026691
85 x 150 cm #3026692



60 x 85 cm #3026330
85 x 115 cm #3026689
85 x 150 cm #3026690




60 x 85 cm #3026342
85 x 115 cm #3026704
85 x 150 cm #3026705



60 x 85 cm #3026336
85 x 115 cm #3026702
85 x 150 cm #3026703

Stock Messages

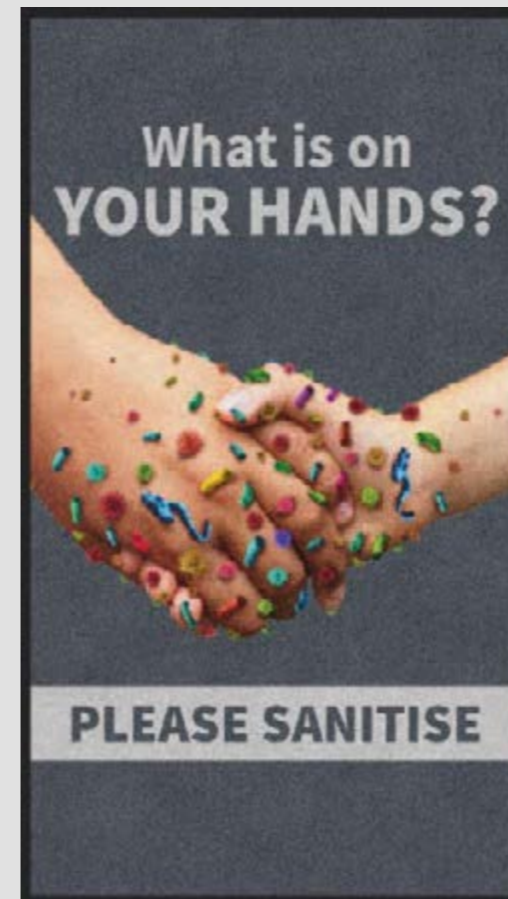

85 x 150 cm #3027112



85 x 150 cm #3027113



85 x 150 cm #3027107



85 x 150 cm #3027108


Stock Messages



115 x 200 cm #3033828




115 x 200 cm #3033829

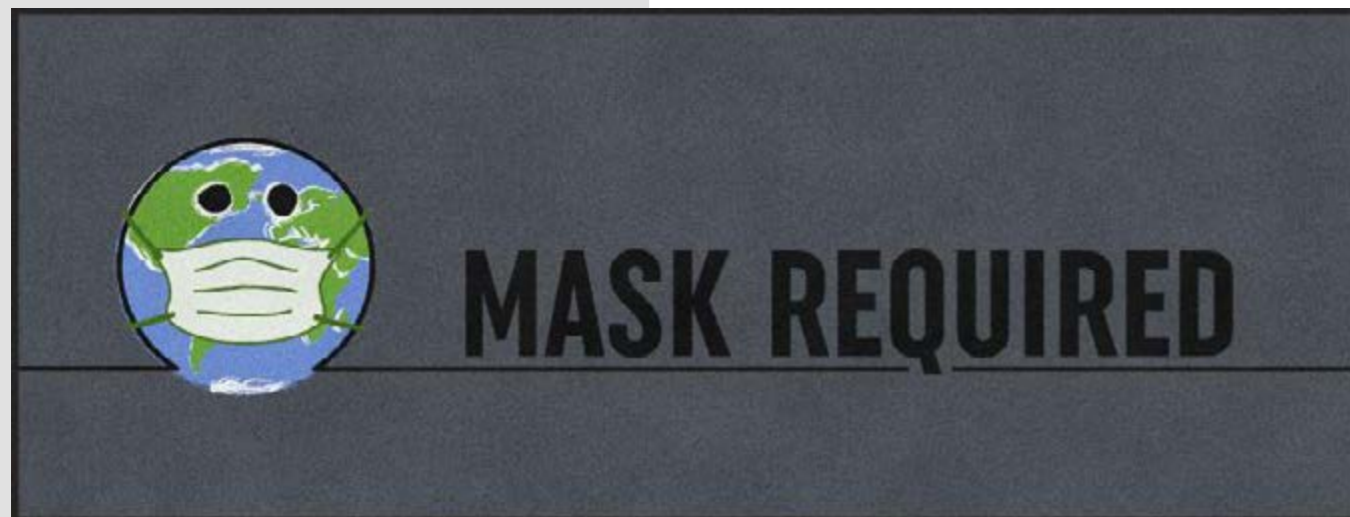

115 x 300 cm #3033827

Stock Messages

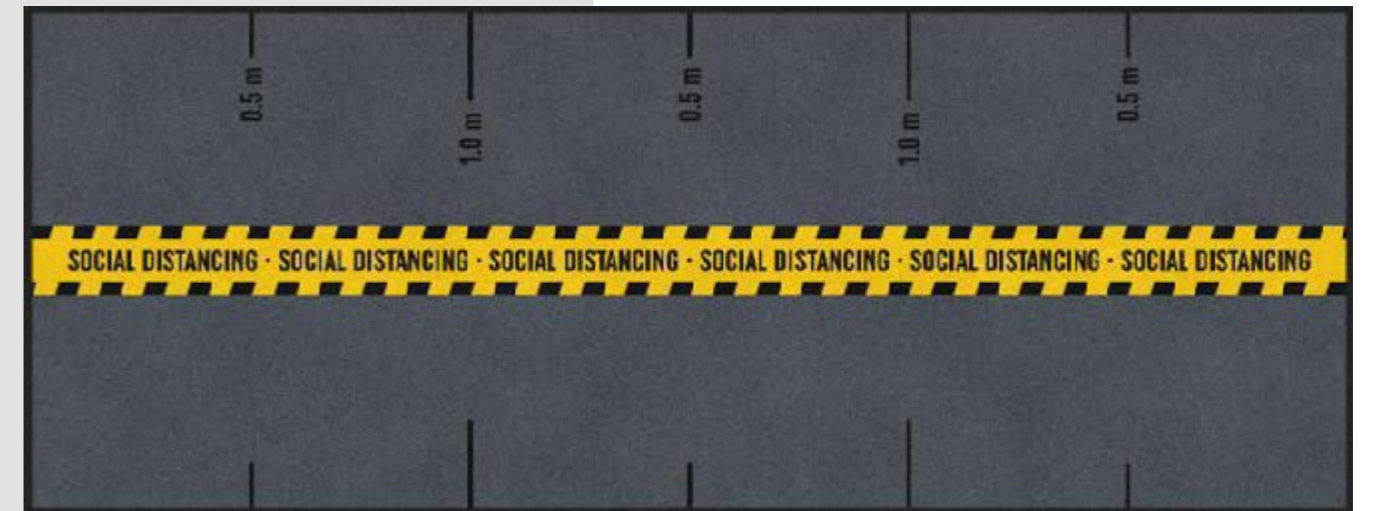

115 x 300 cm #3033824




115 x 300 cm #3033825



115 x 200 cm #3033826


Stock Messages Sani-dry mat combination

Step 01
Wipe your feet thoroughly
to disinfect your soles.

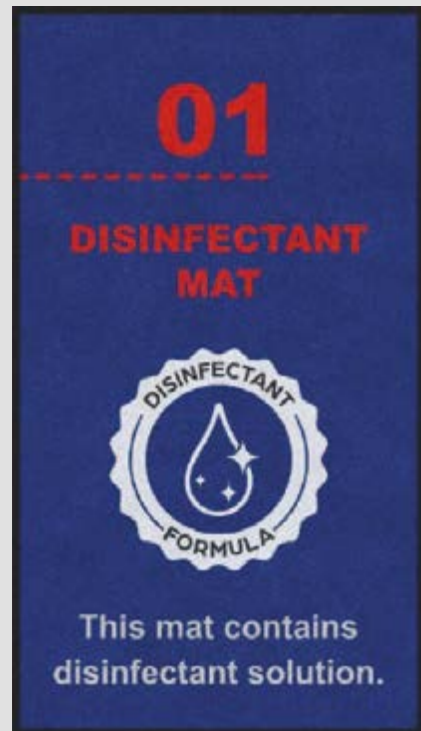

85 x 150 cm #3028049

Step 01
Wipe your feet dry on the
highly absorbent mat.

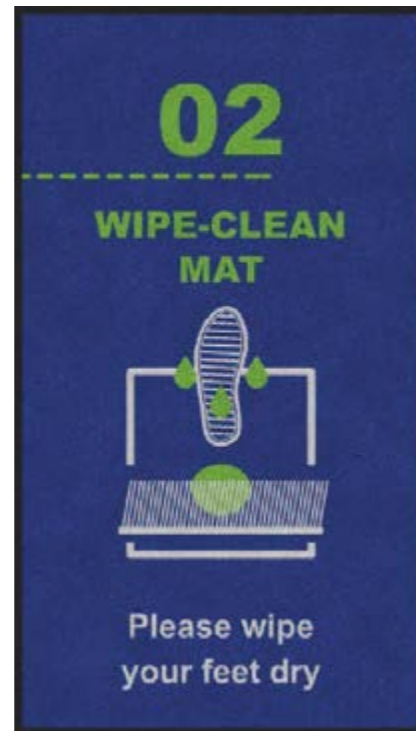

85 x 150 cm #3028051



85 x 150 cm #3028052



85 x 150 cm #3028053

Stock Messages Sani-dry mat combination

Step 01
Wipe your feet thoroughly
to disinfect your soles.



85 x 150 cm #3028047

Step 01
Wipe your feet dry on the
highly absorbent mat.



85 x 150 cm #3028048



85 x 150 cm #3028054



85 x 150 cm #3028055



M + A MATTING

KLEIN FRANKRIJKSTRAAT 14
9600 RONSE - BELGIUM

BELGIUM +32 55 31 95 97
FRANCE +33 1 85 14 92 21
GERMANY +49 89 262 024 870
UK +44 20 3855 5770

MATS@MAMATTING.EU
WWW.MAMATTING.EU

FOLLOW US ON

